

Thank you, and congratulations on your choice of the BOSS Foot Volume FV-500L Before using this unit, carefully read the sections entitled: "USING THE UNIT SAFELY" and "IMPORTANT NOTES." These sections provide important information concerning the proper operation of the unit.

Additionally, in order to feel assured that you have gained a good grasp of every feature provided by your new unit, Owner's manual should be read in its entirety. The manual should be saved and kept on hand as a convenient reference.


© 2005 Roland Corporation

- Low-impedance stereo volume pedal is perfect for connecting to effects processor outputs, keyboards, and other devices with low-impedance output.
- TUNER OUT jack lets you tune without having to change your cable connections.
- With an optional connection cable (stereo 1/4" phone ↔ stereo 1/4" phone), you can also use the FV-500L as an expression pedal.

Using the FV-500L as a volume pedal

Connections


Setup with a guitar

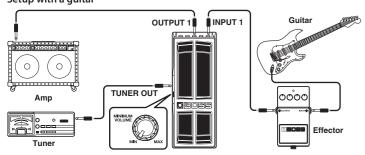

* As BOSS effects processors are equipped with built-in buffer amps, guitar signals are converted to low-impedance signals for resistance to extraneous noise.

Setup for stereo output

Connections

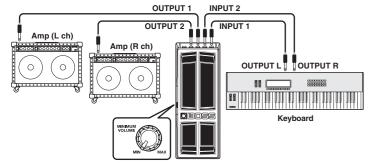

Using the FV-500L as an expression pedal

Stereo 1/4" FXP

Keyboard

between the movable part and the panel.

- * Because the FV-500L is designed low-impedance, it should be set up with a guitar as shown in the picture; after an effect unit
- * To prevent malfunction and/or damage to speakers or other devices, always turn down the volume, and turn off the power on all devices before making
- * When you operate the pedal, please be careful not to get your fingers pinched between the movable part and the panel.

Operation

- 1. Connect the FV-500L to a guitar (or keyboard) and an amp as shown in the
- 2. With the pedal fully depressed, set the maximum volume level by adjusting the volume on the guitar (or keyboard) and amp.
- 3. Return the pedal to the minimum position. set the minimum volume level using the MINIMUM VOLUME knob on the pedal. (The maximum volume level cannot be changed with the MINIMUM VOLUME knob.)
- 4. Adjust the pedal.

Operation

EXP Stereo 1/4"

Now you can control the volume within the range you have just specified.

How to use the TUNER OUT jack

instrument you wish to control.

the MINIMUM VOLUME knob on the pedal.

Connect the output of a guitar to INPUT on the FV-500L. Connect a tuner to the TUNER OUT jack.

If you return the pedal to the minimum position, you can now tune the instrument without any sound from the amplifier. (in this case, set the MINIMUM VOLUME knob to zero.)

1. Connect the EXP jack of the FV-500L to the EXP PEDAL (or EV-5) jack of the

* The FV-500L is similar in design to the Roland EV-5 Expression Pedal and

2. Depress the pedal fully and set the maximum volume on the connected

3. Return the pedal to the minimum position. Set the minimum volume using

* When setting maximum and minimum values on the connected device, be sure to have the MINIMUM VOLUME knob set at the minimum level.

Now you can control the volume within the range you have just specified.

therefore can be connected to the EXP PEDAL (EV-5) jack on Roland BOSS products. Note that connecting to other jacks may result in damage to the

* The signal from INPUT 2 cannot be sent to the TUNER OUT jack.

- A screw on the bottom of the unit allows you to adjust the feel of the pedal to

Main volume (pedal) x 1 MINIMUM VOLUME knob x 1

Connectors:

Control:

Specifications

INPUT jack x 2 OUTPUT jack x 2 TUNER OUT jack x 1 EXP (expression) jack x 1

Dimensions:

110 (W) x 289 (D) x 72 (H) mm 4-3/8 (W) x 11-7/16 (D) x 2-7/8 (H) inches

(Maximum height)

110 (W) x 289 (D) x 120 (H) mm 4-3/8 (W) x 11-7/16 (D) x 4-3/4 (H) inches

1.6 kg/3 lbs 9 oz

Accessorv:

Owner's Manual

* In the interest of product improvement, the specifications and/ or appearance of this unit are subject to change without prior notice.

MPORTANT NOTES

In addition to the items listed under "USING THE UNIT SAFELY," please read and observe the following:

Maintenance

· Never use benzine, thinners, alcohol or solvents of any kind, to avoid the possibility of discoloration and/or deformation.

Additional Precautions

- Use a reasonable amount of care when using the unit's knob or other controls; and when using its jacks and connectors. Rough handling can lead to malfunctions.
- When connecting / disconnecting all cables, grasp the connector itself-never pull on the cable. This way you will avoid causing shorts, or damage to the cable's internal elements.

USING THE UNIT SAFELY

About A WARNING and A CAUTION Notice

≜WARNING	Used for instructions intended to alert the user to the risk of death or severe injury should the unit be used improperly.	
⚠ CAUTION	Used for instructions intended to alert the user to the risk of injury or material damage should the unit be used improperly.	
	* Material damage refers to damage or other adverse effects caused with respect to the home and all its furnishings, as well to domestic animals or pets.	

The \(\Delta \) symbol alerts the user to important instructions of warnings. The specific meaning of the symbol is determined by the design contained within the triangle. In the case of the symbol at left, it is used for general

cautions, warnings, or alerts to danger The Symbol alerts the user to items that must never be carried out (are forbidden). The specific thing that mus not be done is indicated by the design contained within the circle. In the case of the symbol at left, it means that the unit must be used to the complete of the symbol of the complete of the symbol of the symbol


the unit must never be disassembled. he symbol alerts the user to things that must be

carried out. The specific thing that must be done is indicated by the design contained within the circle. In the case of the symbol at left, it means that the power-cord plug must be unplugged from the outlet.

ALWAYS OBSERVE THE FOLLOWING

∕!\ WARNING

Before using this unit, make sure to read the instructions below, and the Owner's Manual.






Do not attempt to repair the unit, or replace parts within it (except when this manual provides specific instructions directing you to do so). Refer all servicing to your retailer, the nearest Roland Service Center, or an authorized Roland distributor. as listed on the "Information."

Never use or store the unit in places that are:

(e.g., direct sunlight in an




- · Damp (e.g., baths, washrooms, on wet floors); or are
- · Humid; or are
- · Exposed to rain; or are

equipment); or are

- · Dusty; or are
- Subject to high levels of vibration.


∕!\ WARNING

Make sure you always have the unit placed so it is level and sure to remain stable. Never place it on stands that could wobble, or on inclined surfaces.





In households with small children, an adult should provide supervision until the child is capable of following all the rules essential for the safe operation of the unit.





✓!\ CAUTION

Try to prevent cords and cables from becoming entangled. Also, all cords and cables should be placed so they are out of the reach of children.





Roland Service Centers and Distributors

When you need repair service, access this URL and find your nearest Roland Service Center or authorized Roland distributor in your

https://roland.cm/service



For EU Countries

Manufacturer: Roland Corporation

Importer:

2036-1 Nakagawa, Hosoe-cho, Hamana-ku, Hamamatsu, Shizuoka 431-1304, JAPAN

Roland Europe Group Limited

Hive 2, 1530 Arlington Business Park, Theale, Reading, Berkshire. RG7 4SA United Kingdom

Responsible Person/Authorized Representative: Roland Central Europe N.V ENA 23 Zone 1 nr. 1620 Klaus-Michael Kuehnelaan 13, 2440 Geel, BELGIUM

Manufacturer: Roland Corporation

2036-1 Nakagawa, Hosoe-cho, Hamana-ku, Hamamatsu, Shizuoka 431-1304, JAPAN

Roland Europe Group Limited

Hive 2, 1530 Arlington Business Park, Theale, Reading, Berkshire, RG7 4SA United Kingdom





CE



You can get the feel of the pedal just the way you like it by rotating the PEDAL FEEL adjustment screw on the FV-500L's bottom panel with a Phillips screwdriver.

* When you operate the pedal, please be careful not to get your fingers pinched

* To use the FV-500L as an expression pedal, you will need an optional

connection cable (stereo 1/4" phone plugs at both ends).

- Turning the screw in the LIGHT (left) direction gives the pedal a lighter feel.
- Turning the screw in the HEAVY (right) direction gives the pedal a heavier feel.



